

Koken® Information


New Addition

Ball point hex bit socket

2011M.50 1/4"



| 2011M.50 (mm) | D (mm) | L (mm) | (g) | (pcs) |
|------------------|-----------|-----------|-----|-------|
| 3 | 12 | 50 | 20 | 10 |
| 4 | 12 | 50 | 20 | 10 |
| 5 | 12 | 50 | 22 | 10 |
| 6 | 12 | 50 | 24 | 10 |

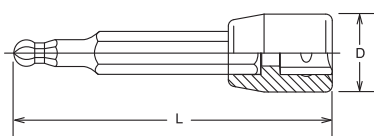

Ball point hex bit sockets have less strength due to the special design.

Please make sure to use the goods properly.

Ball point hex allow to work in confined space.

1/4" Sq.Dr. is new addition to Ball point hex series.


Impact TORX socket

16425-E26 & E28 3/4"

Additional size



| 16425 (E) | D ₁ (mm) | D ₂ (mm) | ℓ (mm) | L (mm) | (g) | (pcs) | (V) |
|--------------|------------------------|------------------------|-----------|-----------|-----|-------|-------|
| E18 | 26.3 | 44 | 12 | 50 | 355 | 5 | 1600C |
| E20 | 28.8 | 44 | 14 | 50 | 370 | 5 | 1600C |
| E22 | 31.3 | 44 | 15 | 50 | 390 | 5 | 1600C |
| E24 | 32.5 | 44 | 17 | 50 | 390 | 5 | 1600C |
| E26 | 35.0 | 44 | 18.8 | 60 | 460 | 2 | 1600C |
| E28 | 36.3 | 44 | 25.2 | 60 | 465 | 2 | 1600C |

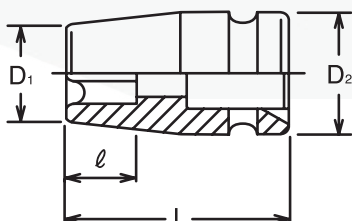

| TORX® (E) | S (ref. mm) | | |
|--------------|----------------|-----|-------|
| | S | S | |
| E 4 | 3.83 | E14 | 12.85 |
| E 5 | 4.72 | E16 | 14.71 |
| E 6 | 5.69 | E18 | 16.64 |
| E 7 | 6.17 | E20 | 18.41 |
| E 8 | 7.47 | E22 | 20.24 |
| E10 | 9.37 | E24 | 22.10 |
| E11 | 10.03 | E26 | 23.85 |
| E12 | 11.12 | E28 | 25.65 |

<http://www.koken-tool.co.jp/>

Koken TOOL CO., LTD.