


Sockets for PSG-Glow Plugs

The PSG-Glow Plugs with pressure sensor should be mounted with protecting cap in order to save the plug-in connection of the PSG-Glow plugs from pollution and electrostatic charging. For this reason we created 2 new types of Glow Plug Sockets which allow a mounting with protecting caps.

Both sockets are equipped with two balls (Nut Grip) in the 12mm 6-point drive end, to fix the Glow Plug safely during the mounting process.

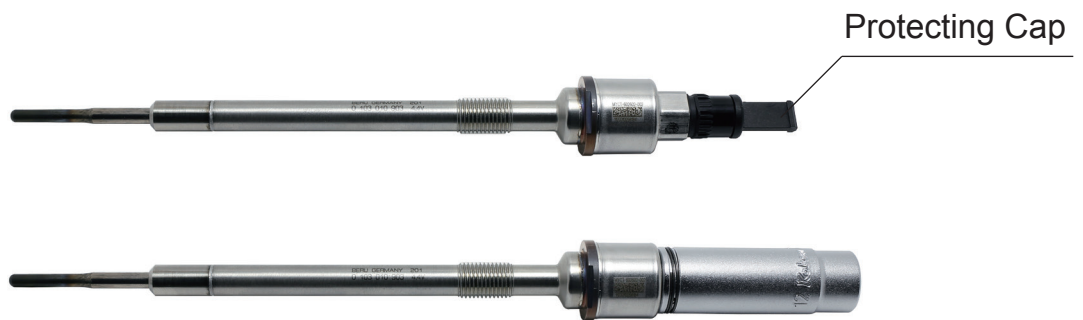


1/4" 2350G-12PSG



2350G-PSG (mm)	D ₁ (mm)	D ₂ (mm)	ℓ (mm)	H (mm)	L (mm)	(g)	(pcs.)
12	16.5	15.5	12	41	50	41	10

1/4" Socket, 12mm 6-point size, total length 50mm, with Nut Grip Extra deep to hold the Glow Plug including protecting cap



3/8" 3341G.89-12(DP52)



3341G.89 (mm)	D ₁ (mm)	D ₂ (mm)	ℓ (mm)	H (mm)	L (mm)	(g)	(pcs.)
12	17.0	19.0	12	52	89	101	10

3/8" Universal Deep Socket, size 12mm, total length 89mm, with two balls (Nut Grip) Extra deep to hold the Glow Plug including protecting cap

